
NON HANDED

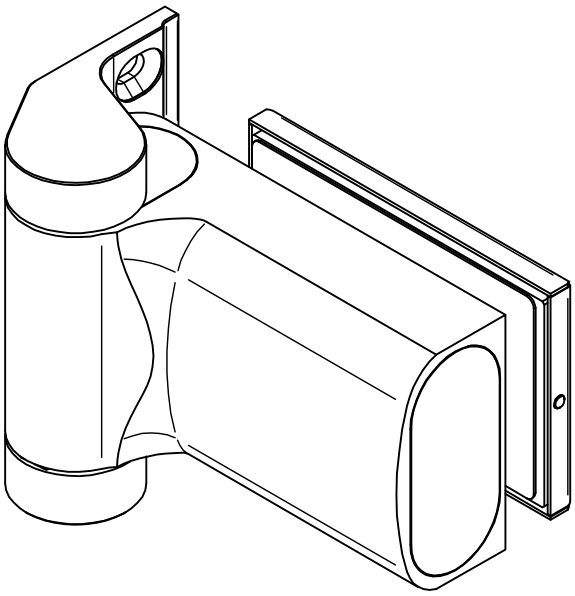

TEMP. RANGE	
min.	-15 °C
max.	+40 °C


HINGE FINISHING:
CHECK ON CATALOG THE TAG (FF) TO ADD TO THE PURCHESING CODE

DOOR WITH TWO HYDRAULIC HINGES

Door height: min. 1700 mm MAX. 3000mm
Door width: min. 700mm MAX. 1000mm
Door weight: MAX. 100 kg


DOOR WITH ONE HYDRAULIC AND ONE DUMMY HINGE


Door height: min. 500 mm MAX. 2000mm
Door width: min. 500mm MAX. 800mm
Door weight: MAX. 50 kg

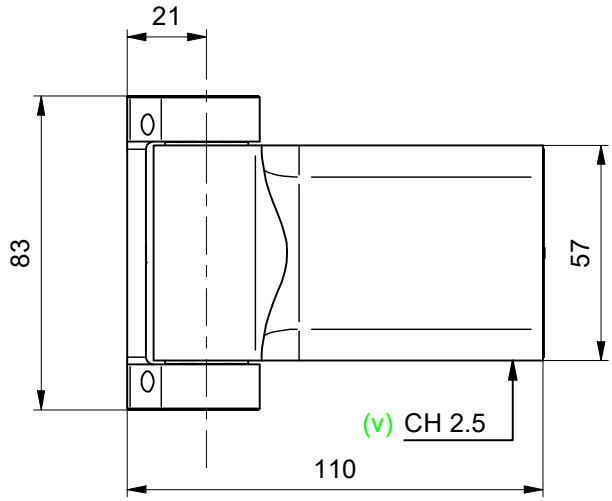

OLMIPAR 10 - SM- DUMMY HINGE


500.744.FF

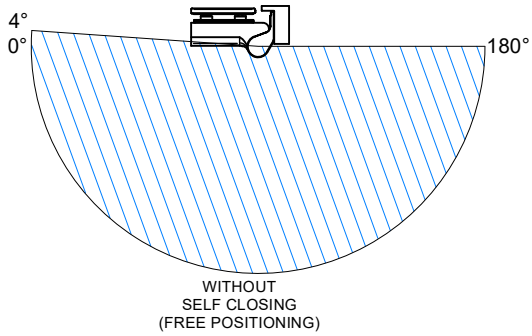


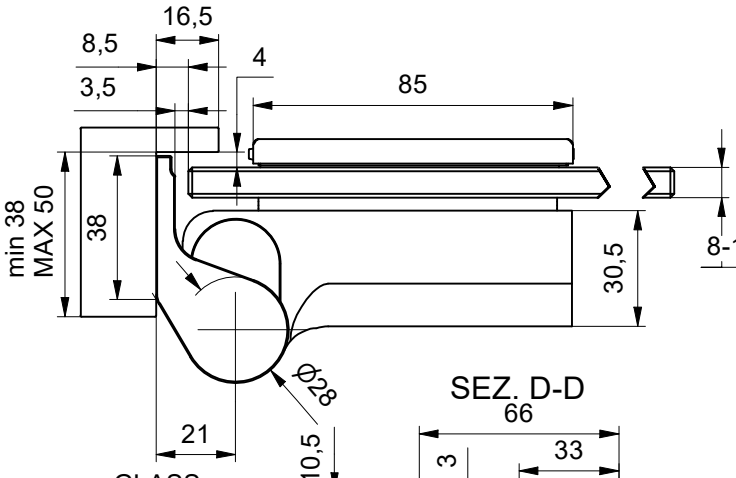



OLMIPAR 11 - WITH HOLD OPEN AT 90° ROTATION UP TO 180°

500.745.FF

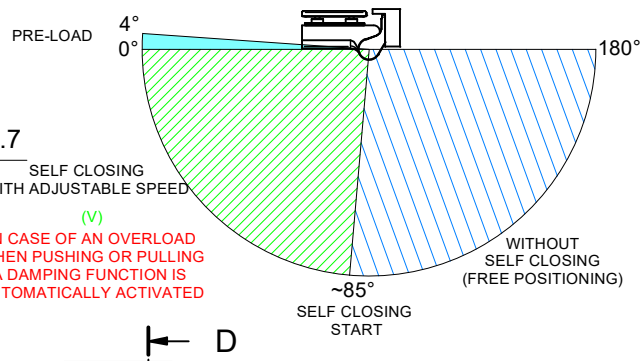



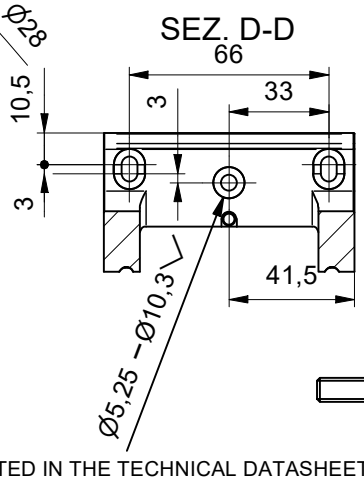


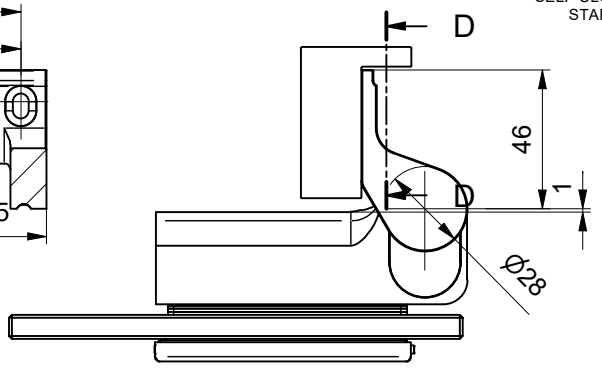

THE PERFORMANCES INDICATED IN THE TECHNICAL DATASHEET ARE RELATED TO A PROPERLY DONE INSTALLATION

This document is the exclusive property of OL.MI s.r.l., by law, any reproduction or disclosure to third parties is prohibited.

NON HANDED

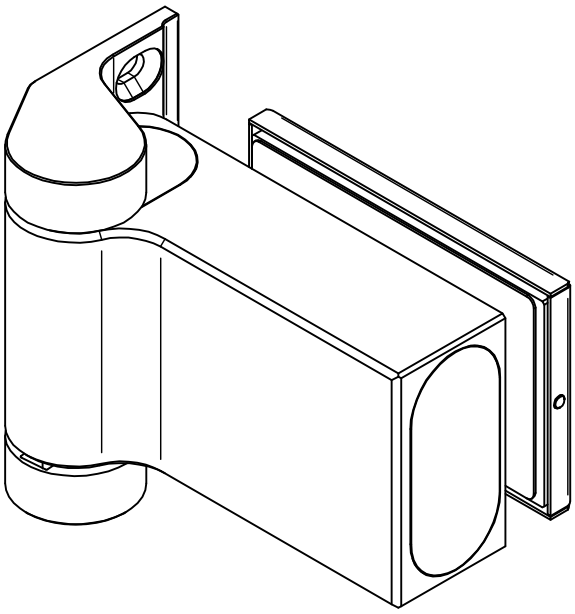

TEMP. RANGE	
min.	-15 °C
max.	+40 °C


HINGE FINISHING:
CHECK ON CATALOG THE TAG (FF) TO ADD TO THE PURCHESING CODE

DOOR WITH TWO HYDRAULIC HINGES

Door height: min. 1700 mm MAX. 3000mm
Door width: min. 700mm MAX. 1000mm
Door weight: MAX. 100 kg


DOOR WITH ONE HYDRAULIC AND ONE DUMMY HINGE


Door height: min. 500 mm MAX. 2000mm
Door width: min. 500mm MAX. 800mm
Door weight: MAX. 50 kg

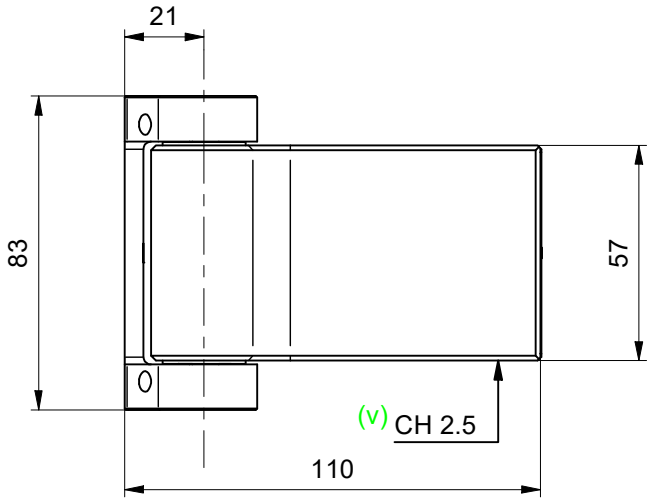

OLMIPAR 20 - SM- DUMMY HINGE SQUARED


500.787.FF

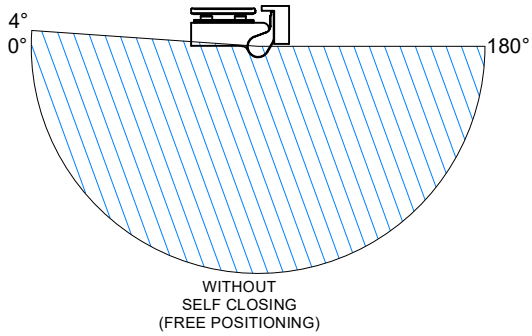


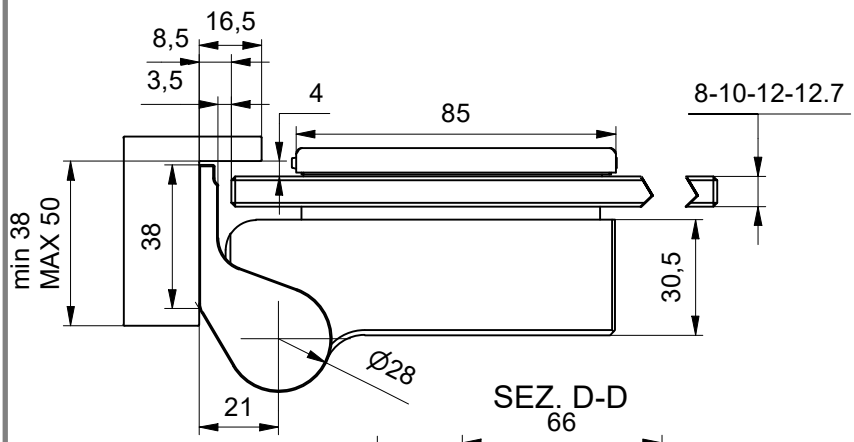



OLMIPAR 11 - WITH HOLD OPEN AT 90° ROTATION UP TO 180° SQUARED

500.788.FF

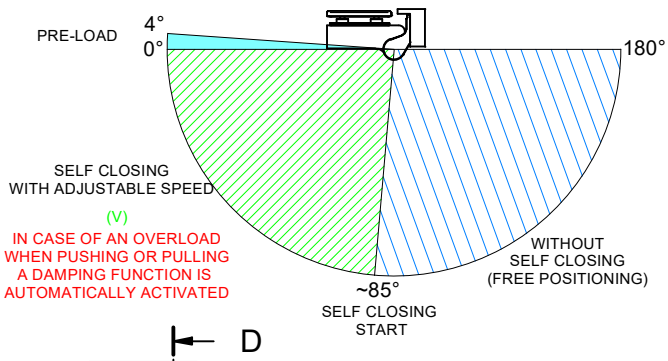



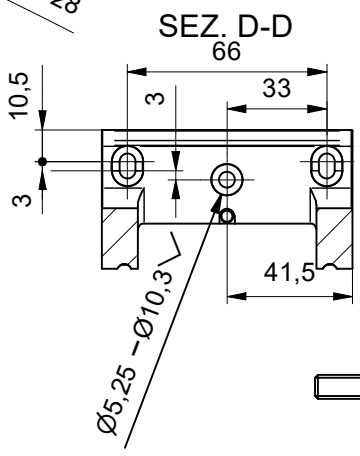

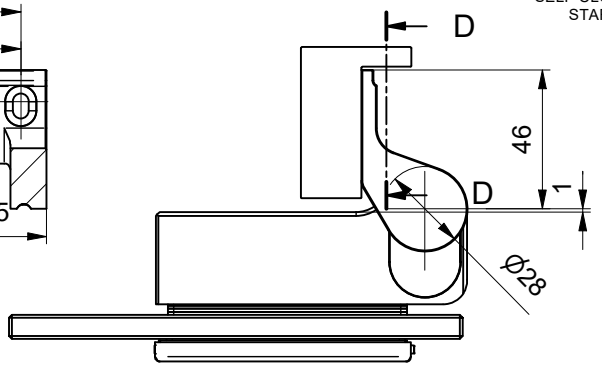

THE PERFORMANCES INDICATED IN THE TECHNICAL DATASHEET ARE RELATED TO A PROPERLY DONE INSTALLATION

This document is the exclusive property of OL.MI s.r.l., by law, any reproduction or disclosure to third parties is prohibited.