
DOUBLE WAY

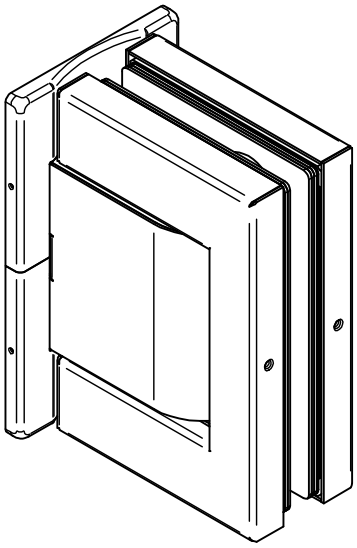

DOOR WITH TWO HYDRAULIC HINGES

Door height: min. 1700 mm MAX. 3000mm
Door width: min. 700mm MAX. 1000mm
Door weight: MAX. 110 kg


DOOR WITH ONE HYDRAULIC AND ONE DUMMY HINGE


Door height: min. 500 mm MAX. 2000mm
Door width: min. 500mm MAX. 800mm
Door weight: MAX. 50 kg

TEMP. RANGE
min. -15 °C
max. +40 °C


HINGE FINISHING:
CHECK ON CATALOG THE TAG (FF) TO ADD TO THE PURCHESING CODE

BODY FINISHING:
DEEP BLACK OXIDATION
50 micron

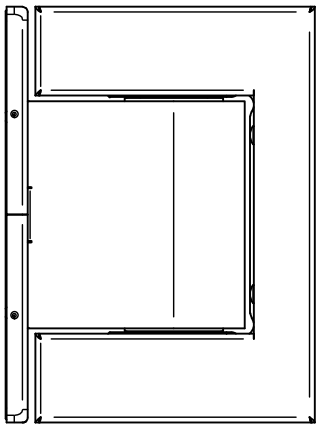


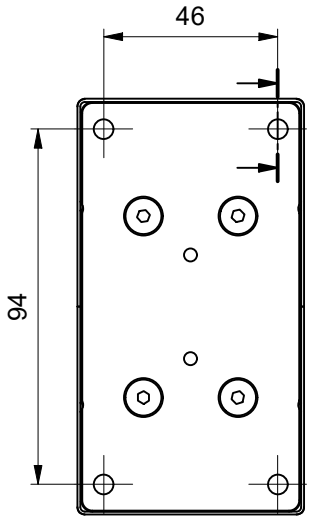


SEZ. A-A





OLMIZEN 10
DUMMY HINGE
Code: **500.682.FF**

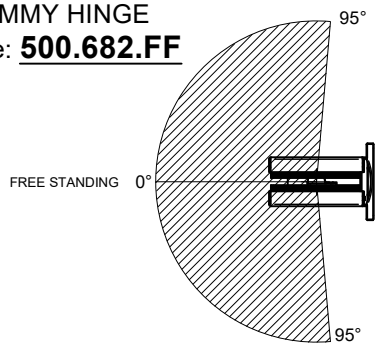


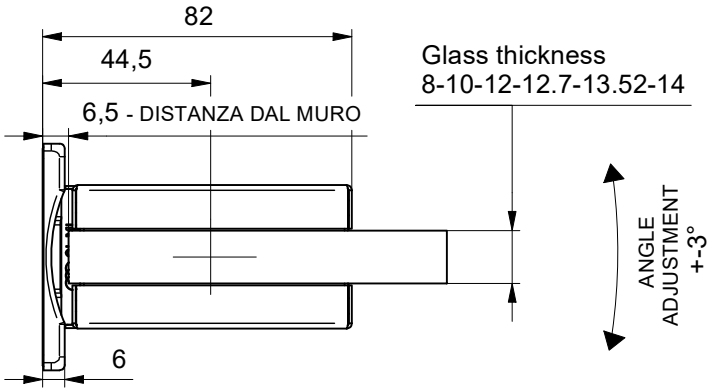


OLMIZEN 11
WITH HOLD OPEN AT 90°
Code: **500.683.FF**

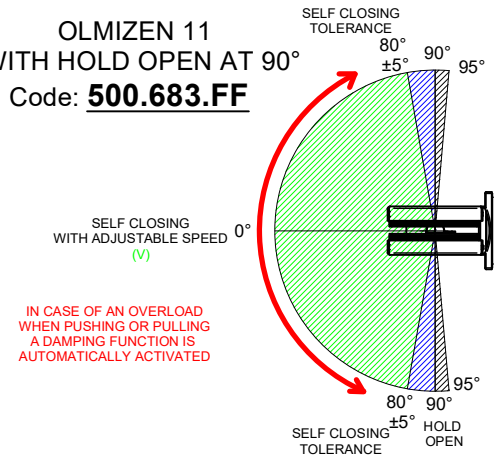



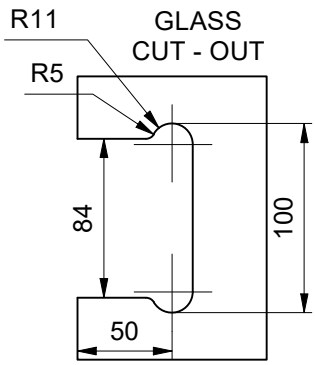


OLMIZEN 12
WITHOUT HOLD OPEN AT 90°
Code: **500.684.FF**

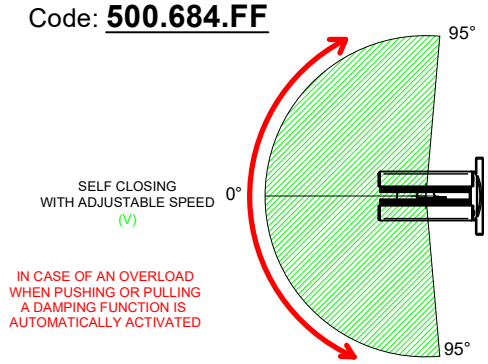

THE PERFORMANCES INDICATED IN THE TECHNICAL DATASHEET ARE RELATED TO A PROPERLY DONE INSTALLATION

This document is the exclusive property of OL.MI s.r.l. , by law, any reproduction or disclosure to third parties is prohibited.

DOUBLE WAY

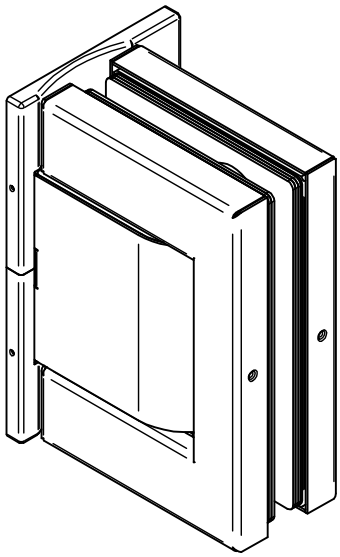

DOOR WITH TWO HYDRAULIC HINGES

Door height: min. 1700 mm MAX. 3000mm
Door width: min. 700mm MAX. 1000mm
Door weight: MAX. 110 kg


DOOR WITH ONE HYDRAULIC AND ONE DUMMY HINGE


Door height: min. 500 mm MAX. 2000mm
Door width: min. 500mm MAX. 800mm
Door weight: MAX. 50 kg

TEMP. RANGE
min. -15 °C
max. +40 °C


HINGE FINISHING:
CHECK ON CATALOG THE TAG (FF) TO ADD TO THE PURCHESING CODE


BODY FINISHING:
DEEP BLACK OXIDATION
50 micron

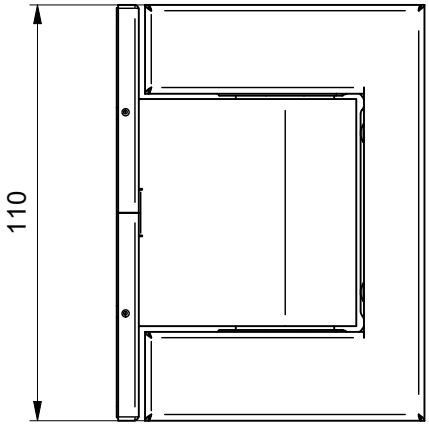

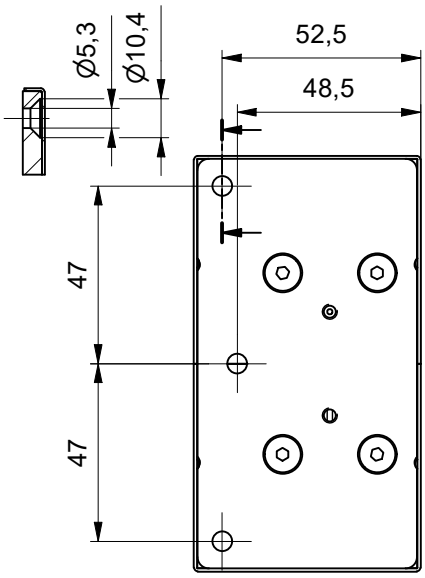



OLMIZEN 20
DUMMY HINGE
Code: **500.685.FF**

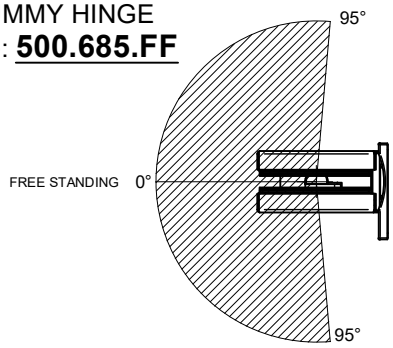

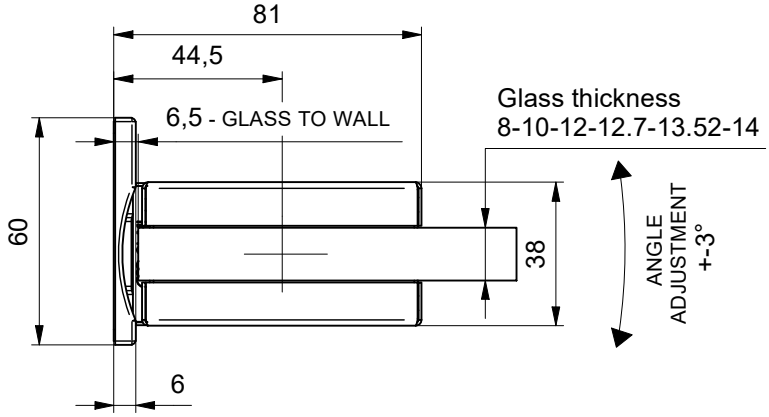


OLMIZEN 21
WITH HOLD OPEN AT 90°
Code :**500.686.FF**

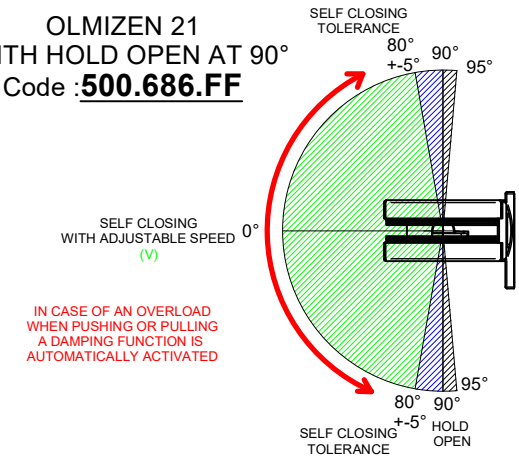

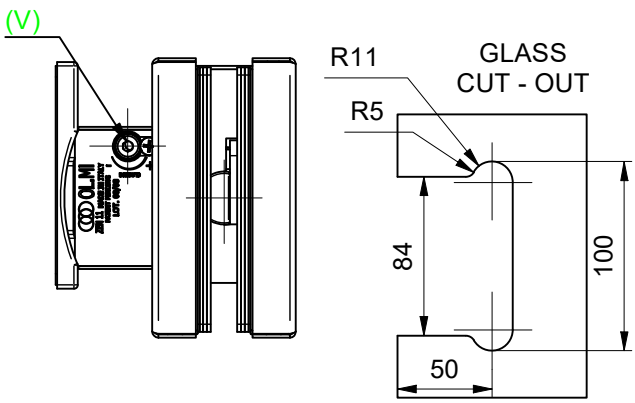


OLMIZEN 22
WITHOUT HOLD OPEN AT 90°
Code: **500.687.FF**

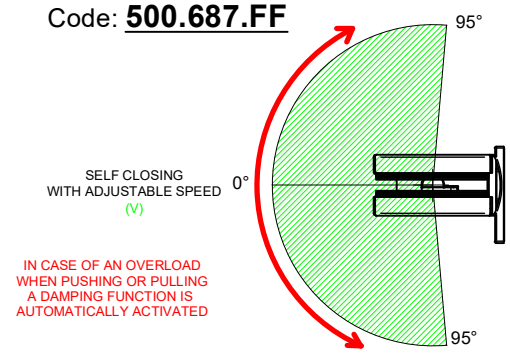


THE PERFORMANCES INDICATED IN THE TECHNICAL DATASHEET ARE RELATED TO A PROPERLY DONE INSTALLATION

This document is the exclusive property of OL.MI s.r.l. , by law, any reproduction or disclosure to third parties is prohibited.

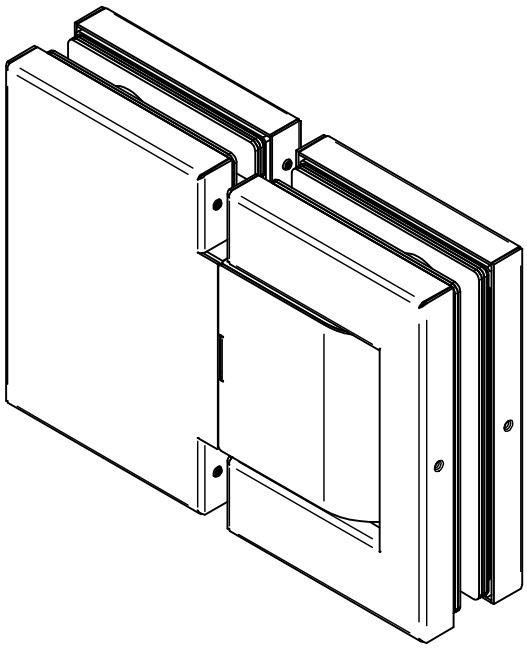

DOUBLE WAY



DOOR WITH TWO HYDRAULIC HINGES

Door height: min. 1700 mm MAX. 3000mm
Door width: min. 700mm MAX. 1000mm
Door weight: MAX. 110 kg


DOOR WITH ONE HYDRAULIC AND ONE DUMMY HINGE

Door height: min. 500 mm MAX. 2000mm
Door width: min. 500mm MAX. 800mm
Door weight: MAX. 50 kg


TEMP. RANGE
min. -15 °C
max. +40 °C

HINGE FINISHING:
CHECK ON CATALOG THE TAG (FF) TO ADD TO THE PURCHESING CODE


BODY FINISHING:
DEEP BLACK OXIDATION
50 micron

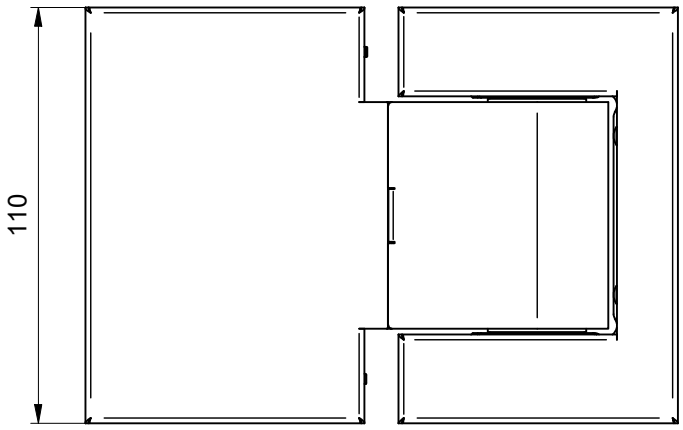


OLMIZEN 30
DUMMY HINGE
Code: **500.688.FF**

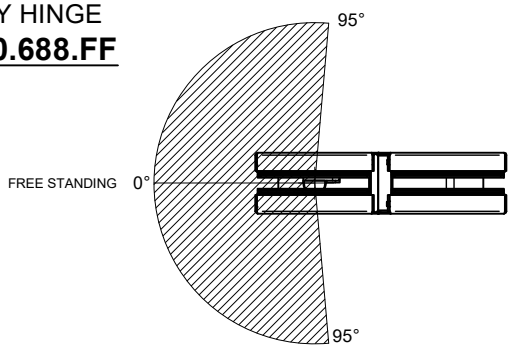



OLMIZEN 31
WITH HOLD OPEN AT 90°
Code: **500.689.FF**

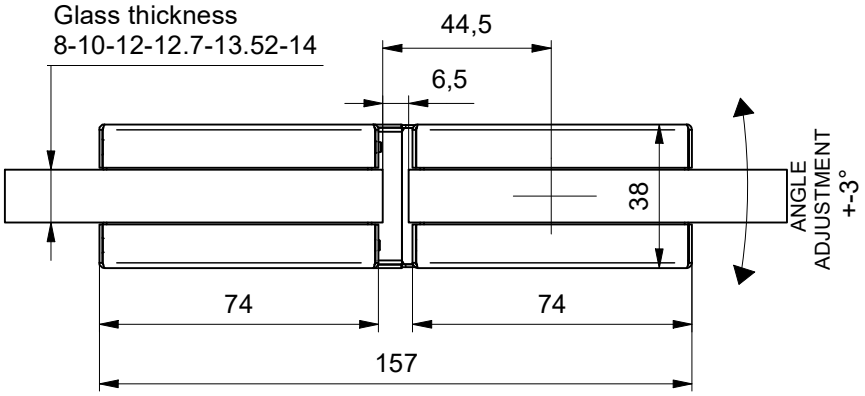

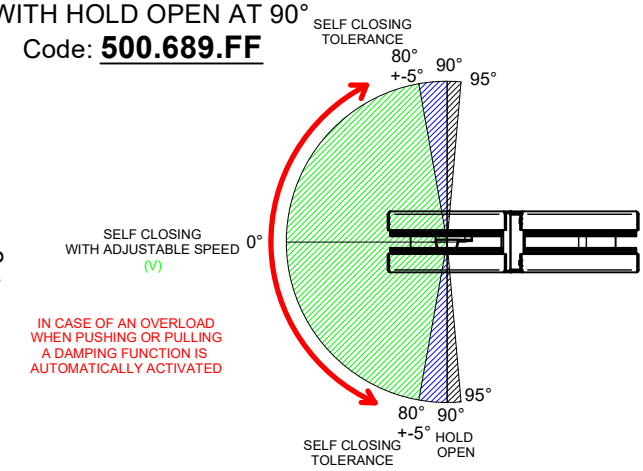


IN CASE OF AN OVERLOAD WHEN PUSHING OR PULLING A DAMPING FUNCTION IS AUTOMATICALLY ACTIVATED

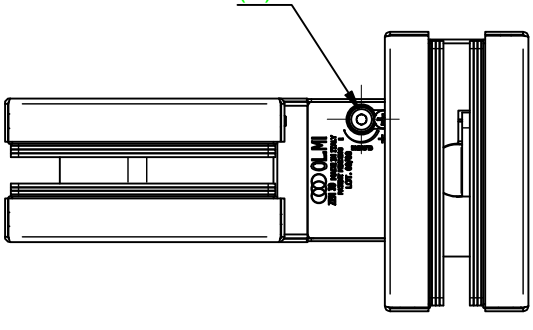

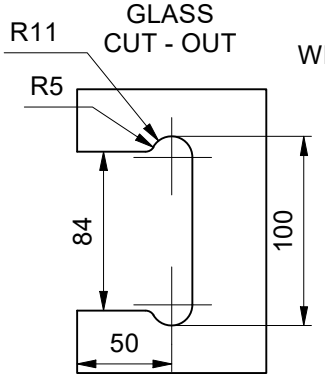

OLMIZEN 32
WITHOUT HOLD OPEN AT 90°
Code: **500.690.FF**

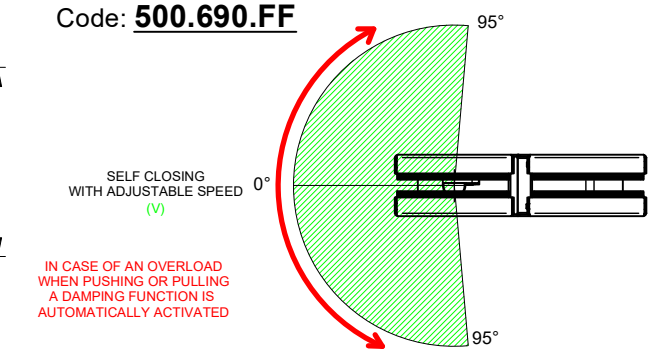

IN CASE OF AN OVERLOAD WHEN PUSHING OR PULLING A DAMPING FUNCTION IS AUTOMATICALLY ACTIVATED

THE PERFORMANCES INDICATED IN THE TECHNICAL DATASHEET ARE RELATED TO A PROPERLY DONE INSTALLATION

This document is the exclusive property of OL.MI s.r.l. , by law, any reproduction or disclosure to third parties is prohibited.