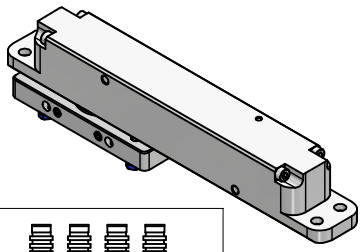

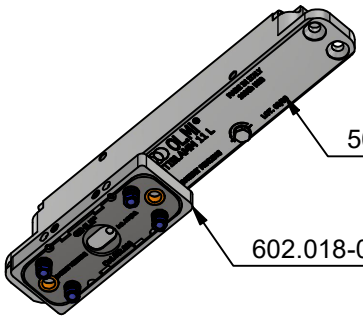


INCLUDED THE KIT

| DOOR WEIGHT | FINISHING: DEEP BLACK OXIDATION 50 micron |
|---|---|
| max. 50 kg | |
| DOOR HEIGHT min. 1000 mm max. 3000 mm | TEMP. RANGE min. -15 °C max. +40 °C |

DETAIL A ( 1 : 1 )




SEZ. A-A




DOOR WIDTH
min. 500 mm
max.800 mm
*WIDTH UP TO 1600 mm DEPENDING AXEL POSITION




L MAX= 800mm

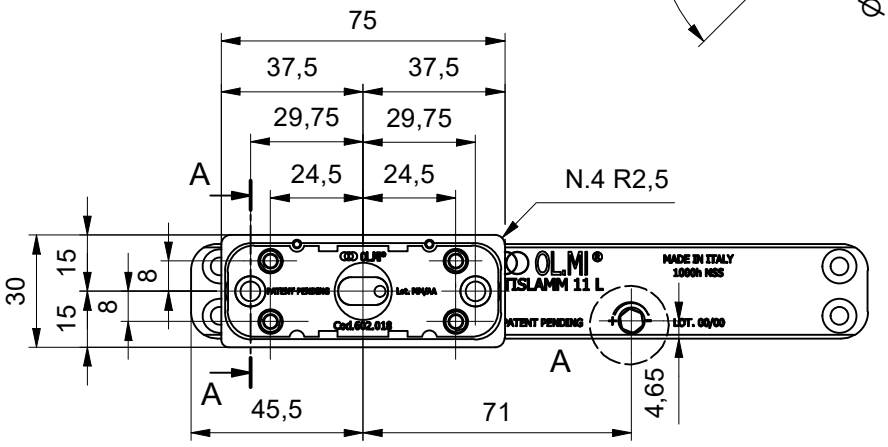


## ANTISLAMM 11 L WITH HOLD OPEN AT 90°

***code:500.736-00***

| COMPOSITION | | |
|---|---|---|
| CODE | CODE | FINAL CODE |
| 500.732.00 | 602.018.00.A0 | 500.736.00.A0 |
| 500.732.00 | 602.018.00.A1 | 500.736.00.A1 |
| 500.732.00 | 602.018.00.A2 | 500.736.00.A2 |

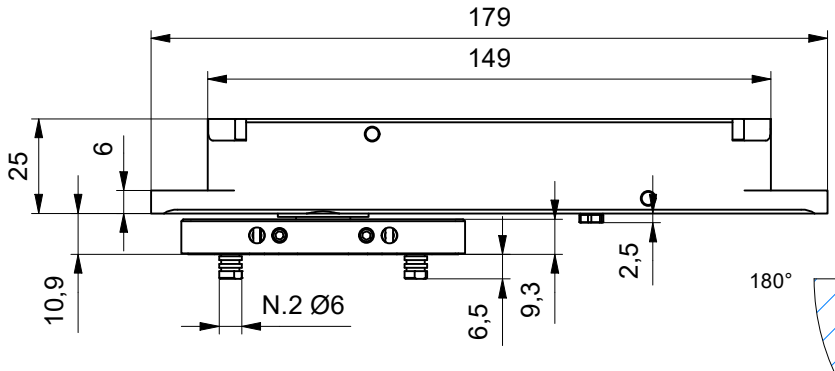


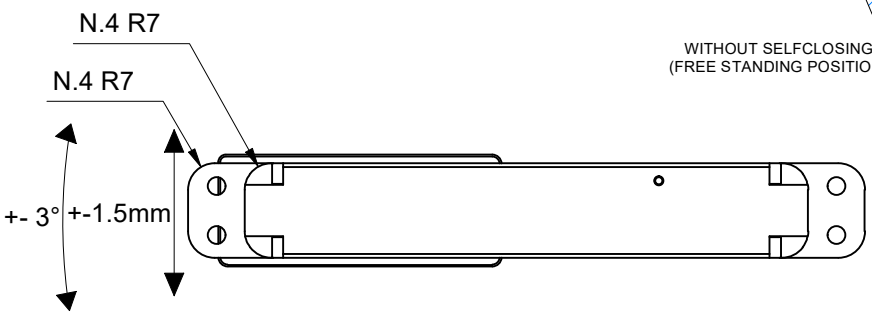

## HINGE HOUSING

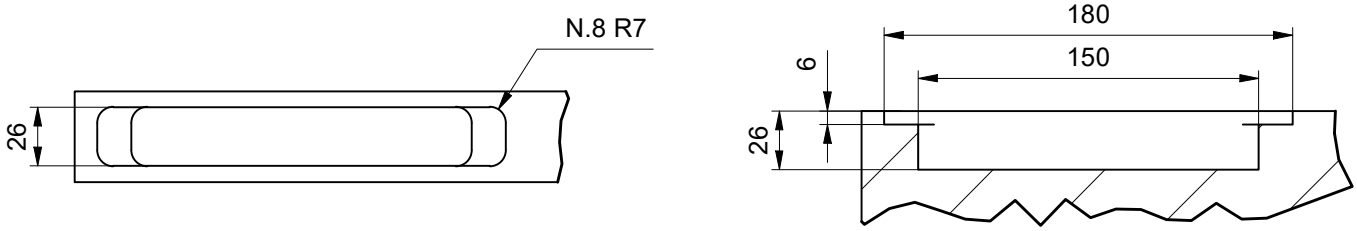


THE PERFORMANCES INDICATED IN THE TECHNICAL DATASHEET ARE RELATED TO A PROPERLY DONE INSTALLATION

This document is the exclusive property of OL.MI s.r.l. , by law, any reproduction or disclosure to third parties is prohibited.

# CODICE 602.021-00

| DOOR WEIGHT | FINISHING: NATURAL OXIDATION PLATE AND AISI PIN |
|---|---|
| max.80 kg | |
| DOOR HEIGHT min. 1000 mm max. 3000 mm | TEMP. RANGE min. -15 °C max. +40 °C |
| DOOR WIDTH min. 500 mm max.800 mm *WIDTH UP TO 1600 mm DEPENDING AXEL POSITION | |

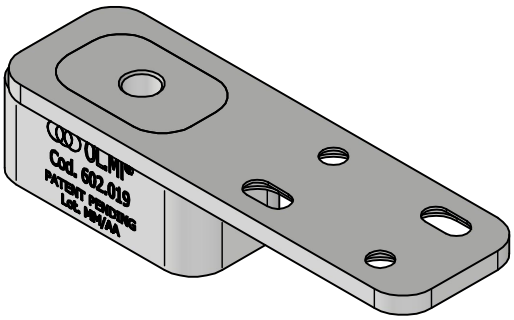





L MAX= 800mm

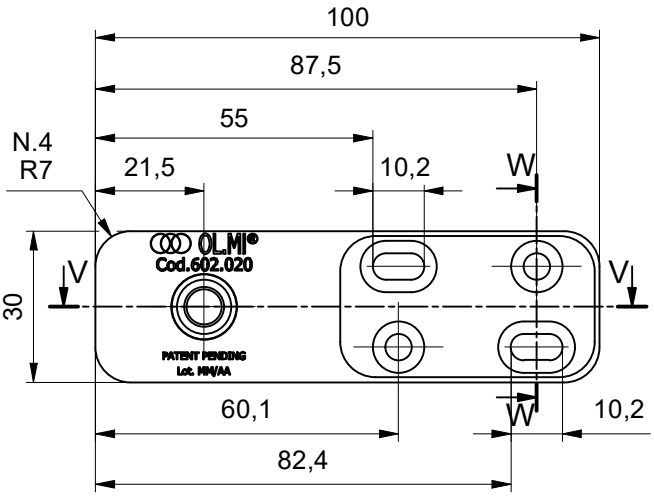


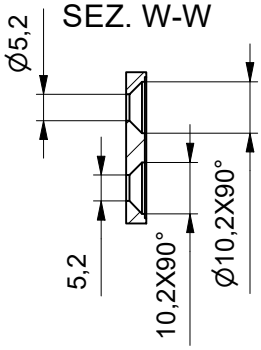


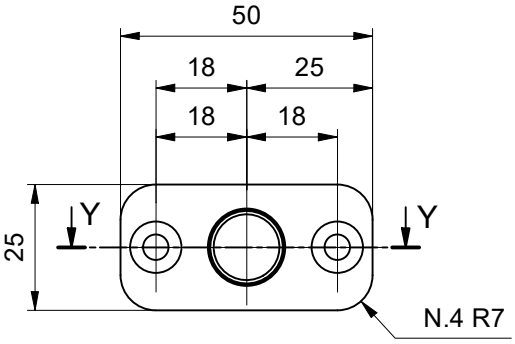


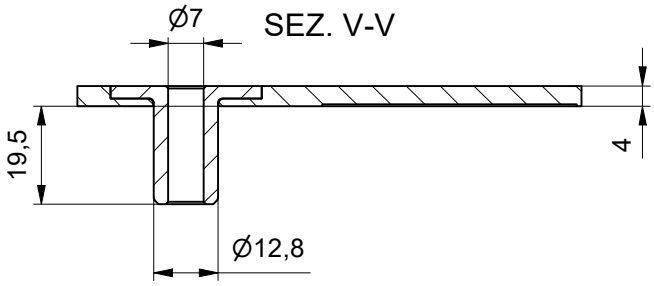


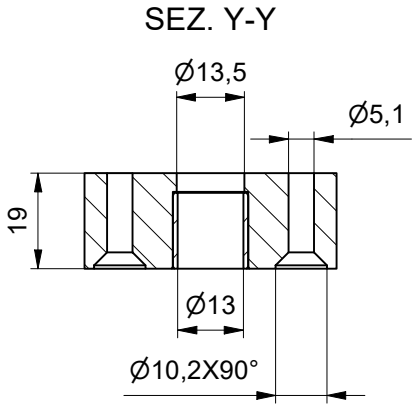


TOP FITTING HOUSING

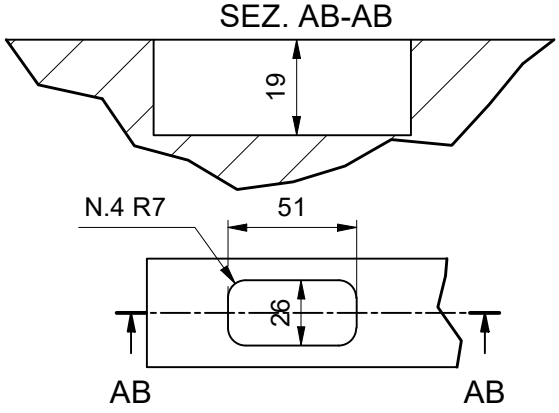


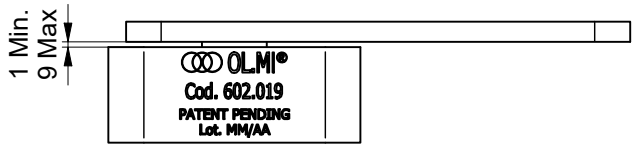


THE PERFORMANCES INDICATED IN THE TECHNICAL DATASHEET ARE RELATED TO A PROPERLY DONE INSTALLATION

This document is the exclusive property of OL.MI s.r.l. , by law, any reproduction or disclosure to third parties is prohibited.