
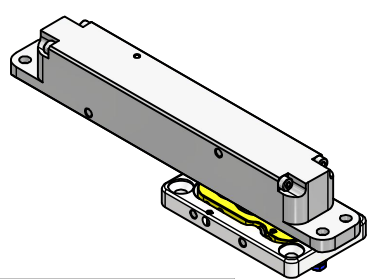


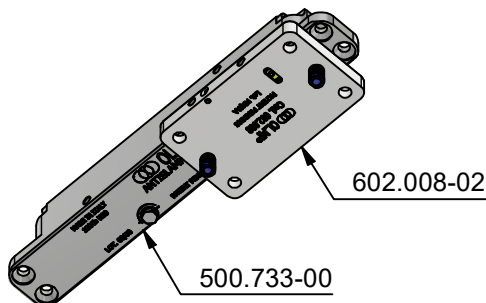

DOOR WEIGHT

max. 50 kg

FINISHING:
DEEP BLACK
OXIDATION
50 micron

DOOR
HEIGHT


min. 1000 mm
max. 3000 mm

TEMP. RANGE
min. -15 °C
max. +40 °C


DOOR WIDTH

min. 500 mm
max. 800 mm


*WIDTH UP TO
1600 mm
DEPENDING AXEL
POSITION



L MAX= 800mm




COVER OPTIONAL




INCLUDED THE KIT



SEZ. B-B





SEZ. A-A



75(77 WITH COVER)

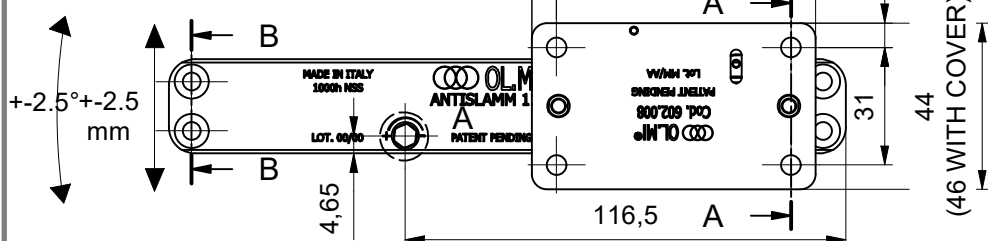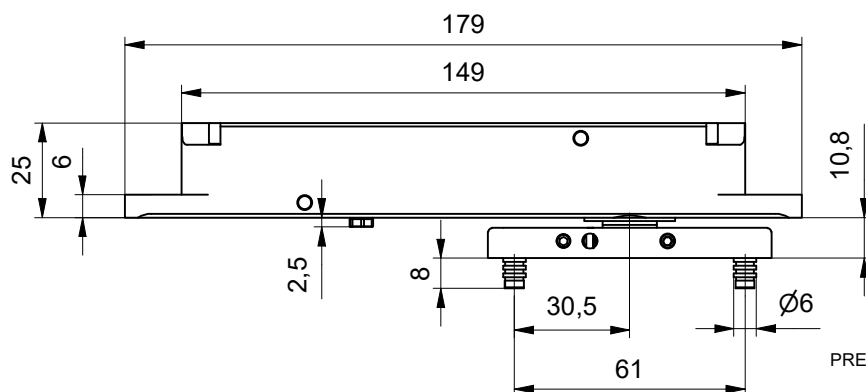


DETAIL A (1 : 1)


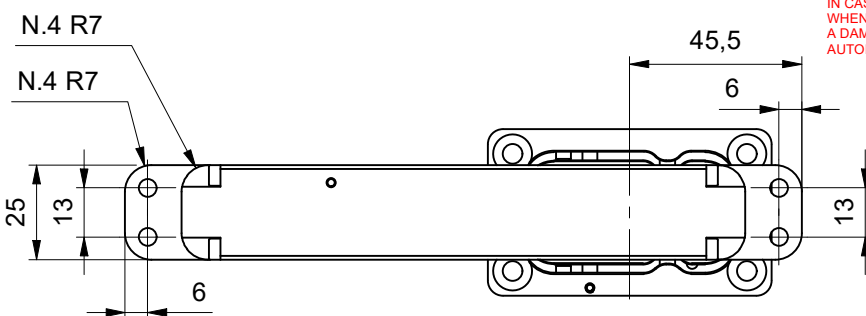
CH 6
(V)

HINGE HOUSING

N.8 R7

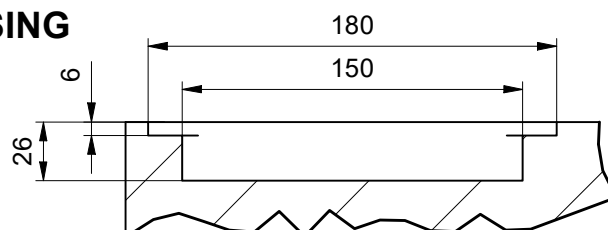

THE PERFORMANCES INDICATED IN THE TECHNICAL DATASHEET ARE RELATED TO A PROPERLY DONE INSTALLATION

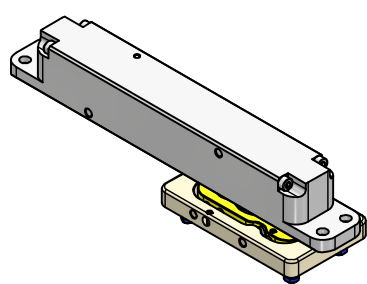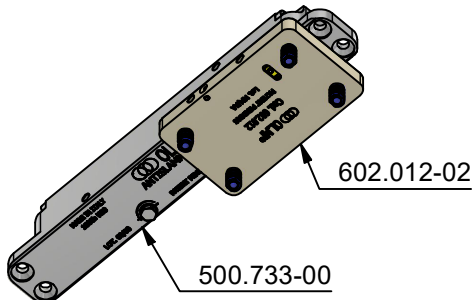

DOOR WEIGHT

max. 50 kg

FINISHING:
DEEP BLACK
OXIDATION
50 micron


DOOR
HEIGHT

min. 1000 mm
max. 3000 mm



TEMP. RANGE
min. -15 °C
max. +40 °C

DOOR WIDTH



min. 500 mm
max. 800 mm
*WIDTH UP TO
1600 mm
DEPENDING AXEL
POSITION




L MAX= 800mm






SEZ. A-A

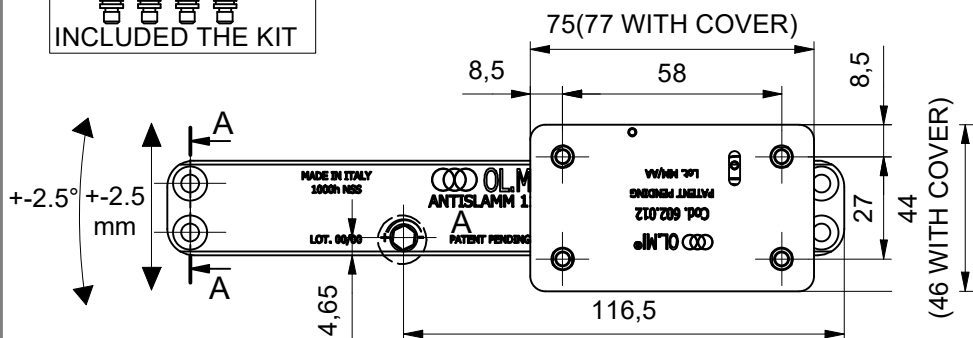

ANTISLAMM 11 R
WITH HOLD OPEN AT 90°
code: 500.749-00

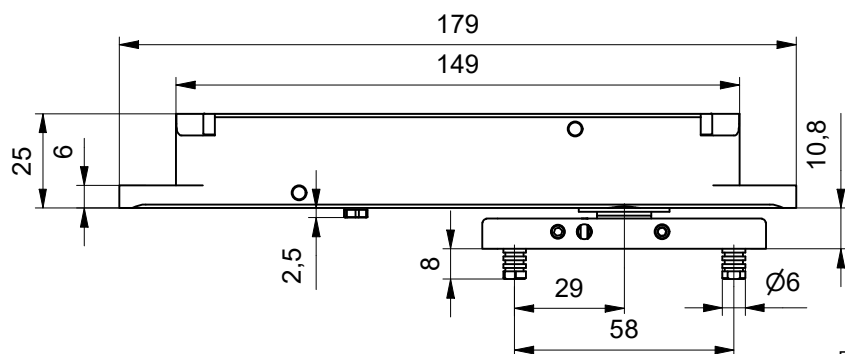


DETAIL A (1 : 1)

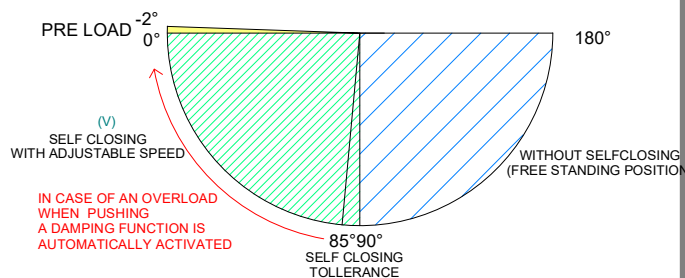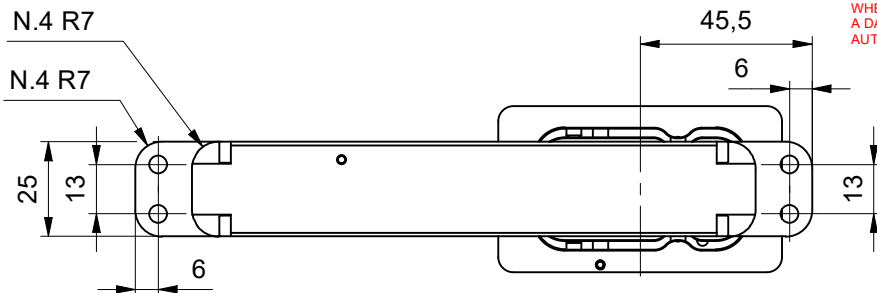


HINGE HOUSING

N.8 R7

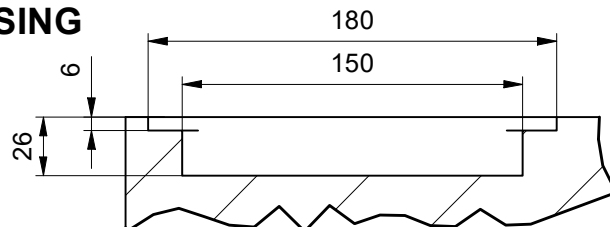

CODE 602.015-00

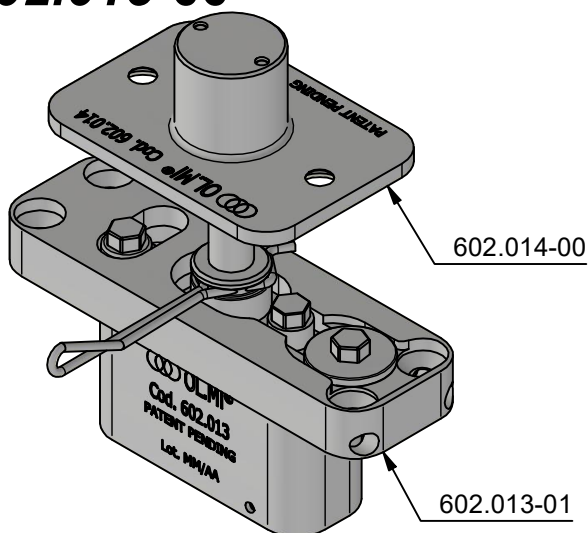

DOOR WEIGHT

max. 120 kg

FINISHING:
DEEP BLACK
OXIDATION
50 micron


DOOR HEIGHT

min. 1000 mm
max. 3000 mm







TEMP. RANGE
min. -15 °C
max. +40 °C

DOOR WIDTH


min. 500 mm
max. 1200 mm



L MAX= 1000mm

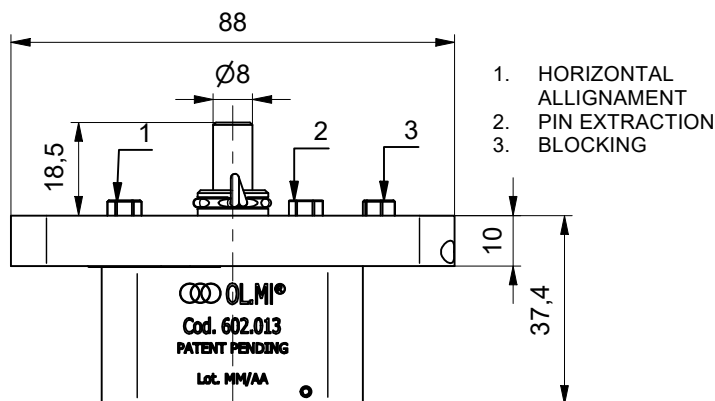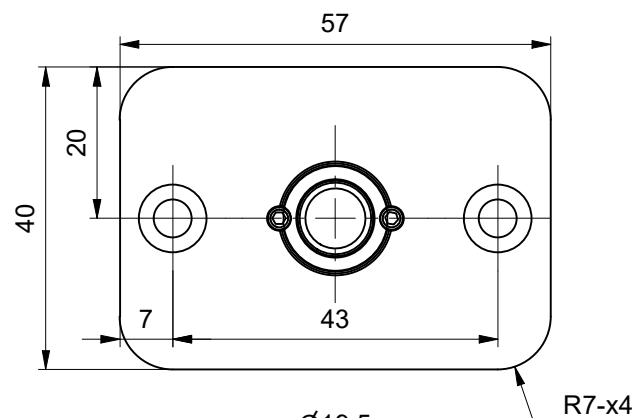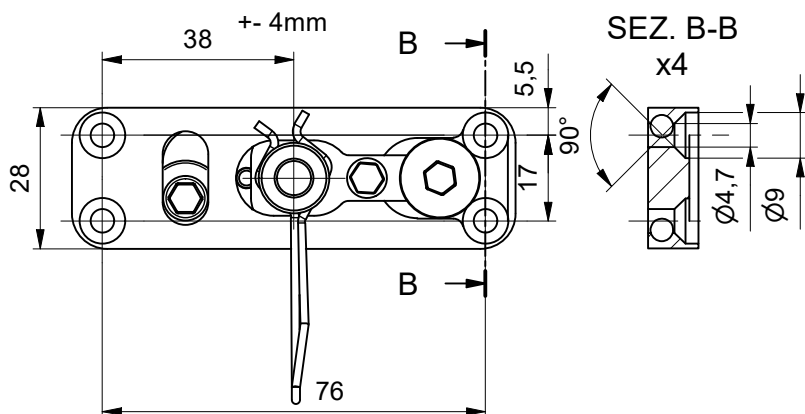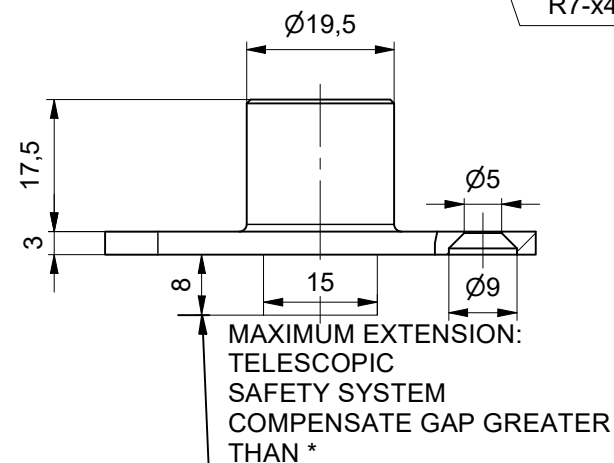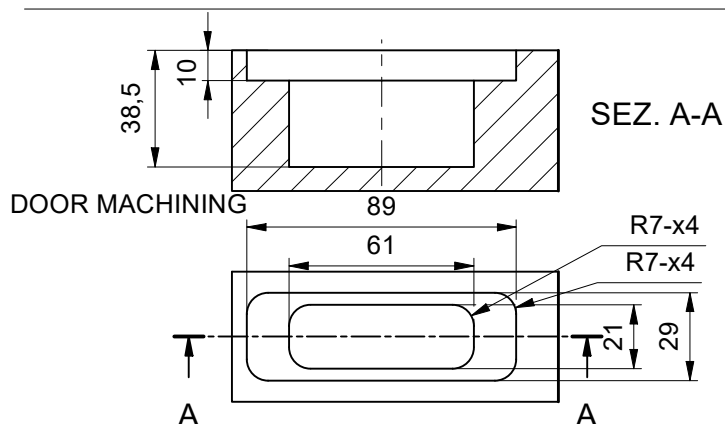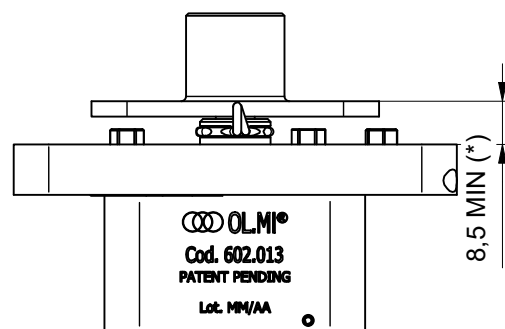

CODE: 602.016-00

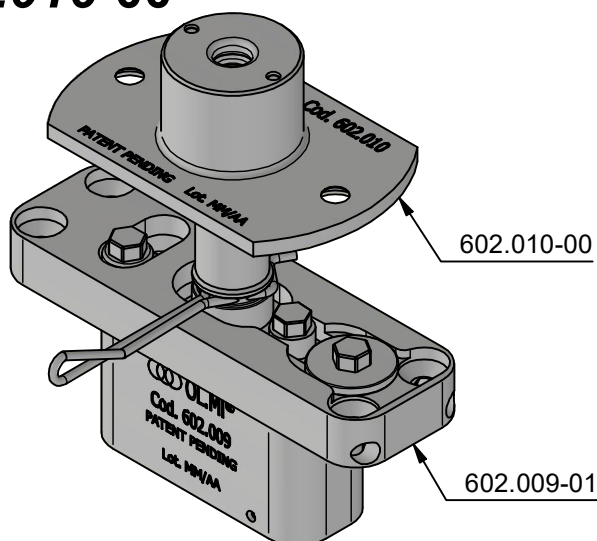

DOOR WEIGHT

max. 120 kg

FINISHING:
DEEP BLACK
OXIDATION
50 micron


DOOR
HEIGHT

min. 1000 mm
max. 3000 mm





TEMP. RANGE
min. -15 °C
max. +40 °C

DOOR WIDTH

min. 500 mm
max. 1200 mm



L MAX= 1000mm

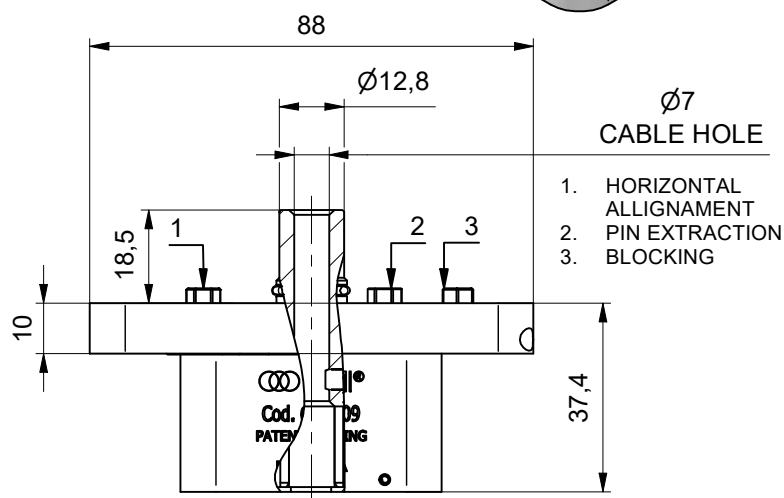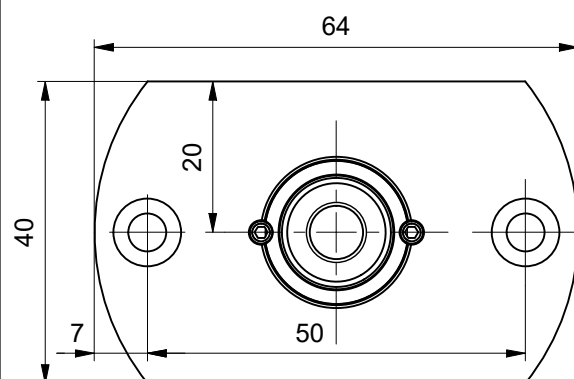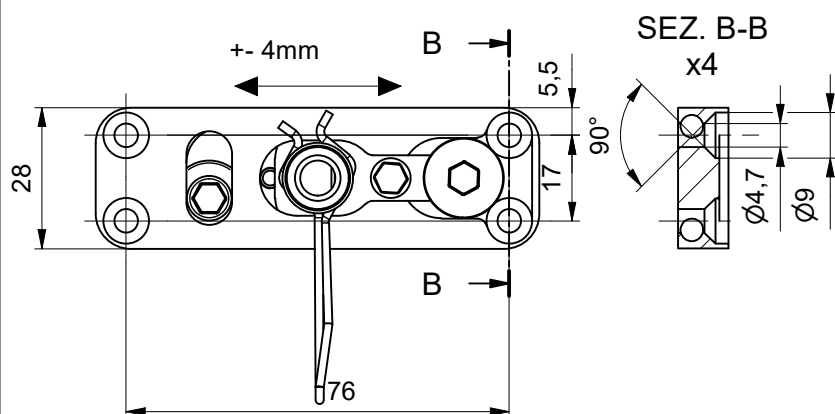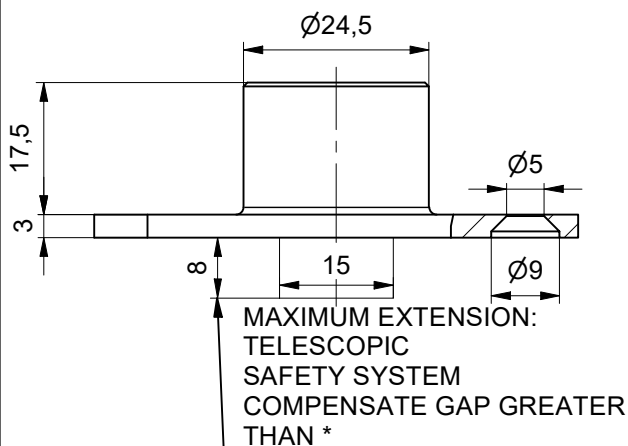

MAXIMUM EXTENSION:
TELESCOPIC
SAFETY SYSTEM
COMPENSATE GAP GREATER
THAN *

