

ANTISLAMM 21 L BASE PLATE WITH SCREWS

REV. : 00







DOOR WEIGHT	FINISHING: DEEP BLACK OXIDATION 50 micron
max. 50 kg	
DOOR HEIGHT min. 1000 mm max. 3000 mm	TEMP. RANGE min. -15 °C max. +40 °C


COVER OPTIONAL


INCLUDED THE KIT





DOOR WIDTH
min. 500 mm
max.800 mm
*WIDTH UP TO 1600 mm DEPENDING AXEL POSITION




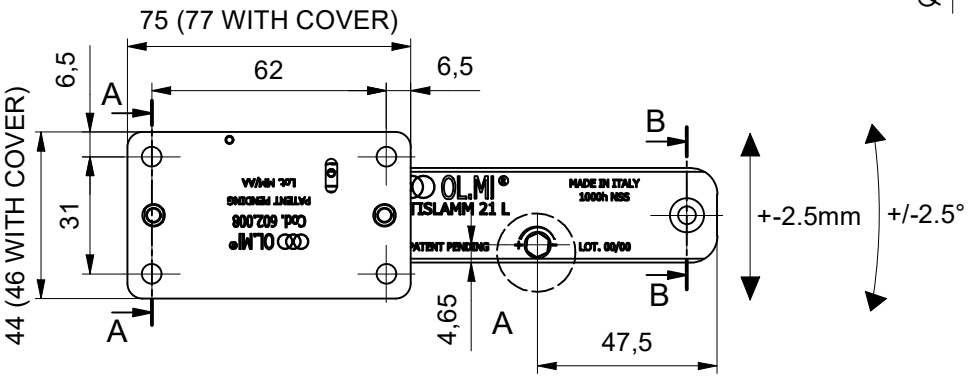



ANTISLAMM 21 L WITH HOLD OPEN AT 90°


code:500.750-00

DETAIL A (1 : 1)




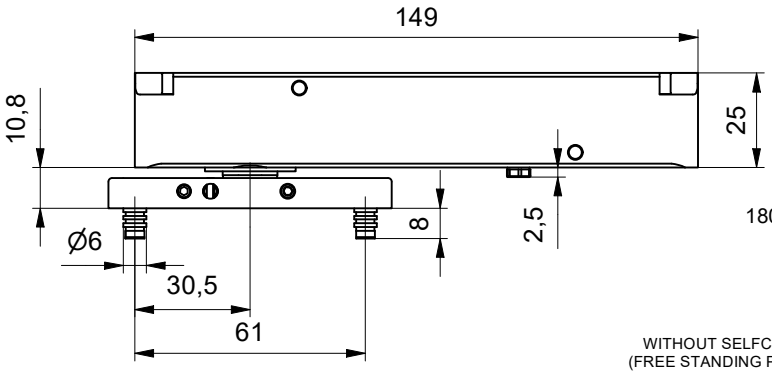


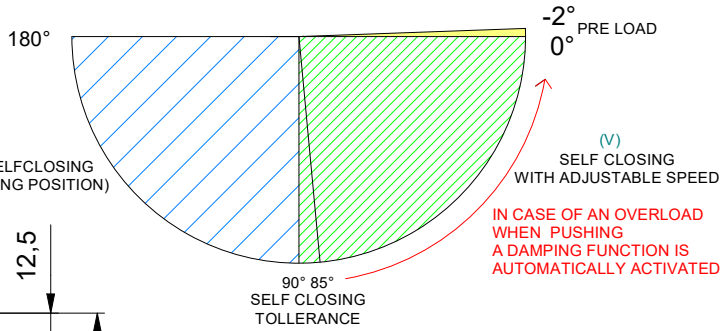

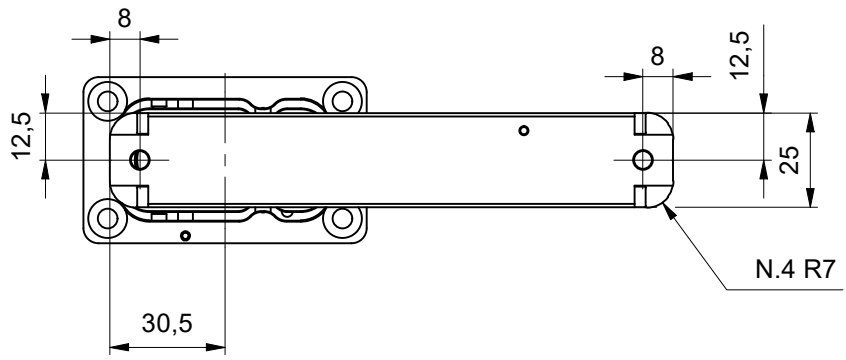


HINGE HOUSING

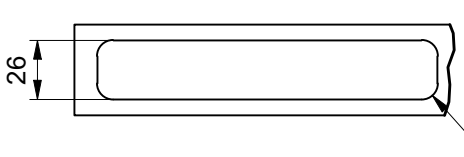


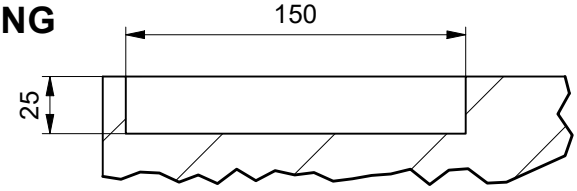

THE PERFORMANCES INDICATED IN THE TECHNICAL DATASHEET ARE RELATED TO A PROPERLY DONE INSTALLATION

This document is the exclusive property of OL.MI s.r.l. , by law, any reproduction or disclosure to third parties is prohibited.







COVER OPTIONAL

INCLUDED THE KIT


SEZ. A-A



DOOR WEIGHT	FINISHING: DEEP BLACK OXIDATION 50 micron
max. 50 kg	
DOOR HEIGHT min. 1000 mm max. 3000 mm	TEMP. RANGE min. -15 °C max. +40 °C
DOOR WIDTH min. 500 mm max.800 mm *WIDTH UP TO 1600 mm DEPENDING AXEL POSITION	




L MAX= 800mm

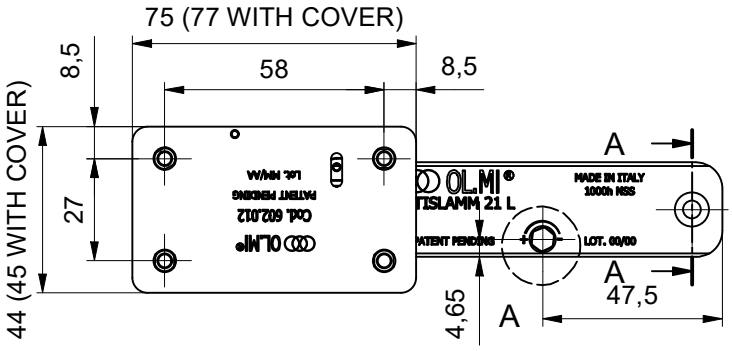



ANTISLAMM 21 L WITH HOLD OPEN AT 90°


*code:**500.751-00***

DETAIL A (1 : 1)




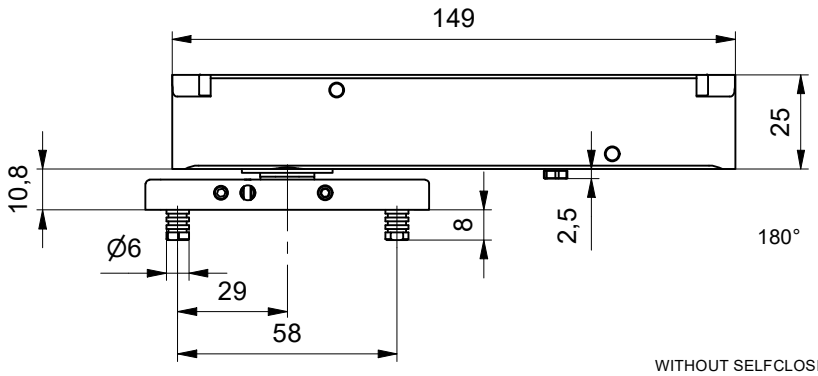


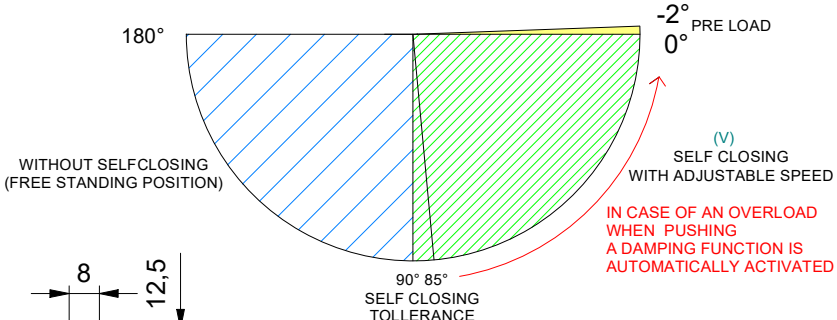

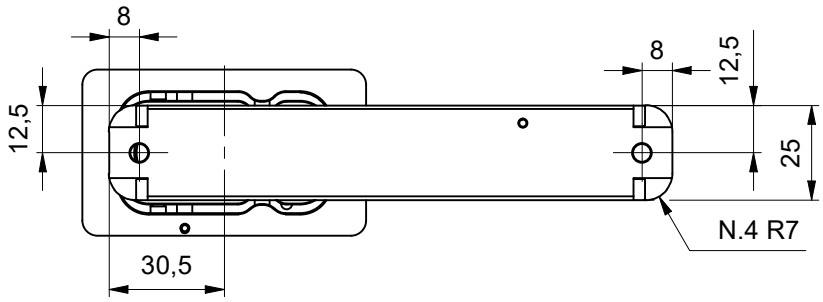

HINGE HOUSING

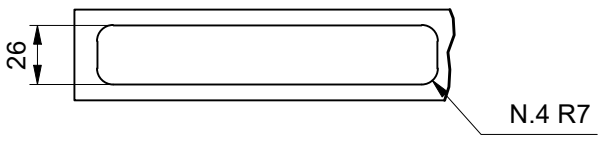


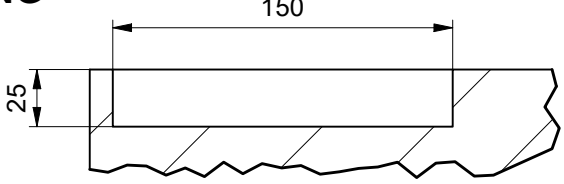


THE PERFORMANCES INDICATED IN THE TECHNICAL DATASHEET ARE RELATED TO A PROPERLY DONE INSTALLATION

This document is the exclusive property of OL.MI s.r.l. , by law, any reproduction or disclosure to third parties is prohibited.


CODE 602.015-00

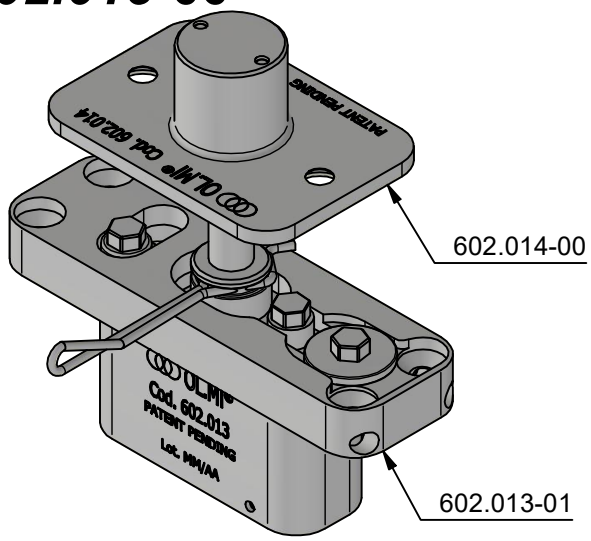


DOOR WEIGHT max. 120 kg	FINISHING: DEEP BLACK OXIDATION 50 micron
DOOR HEIGHT min. 1000 mm max. 3000 mm	TEMP. RANGE min. -15 °C max. +40 °C
DOOR WIDTH min. 500 mm max.1200 mm	





L MAX= 1000mm

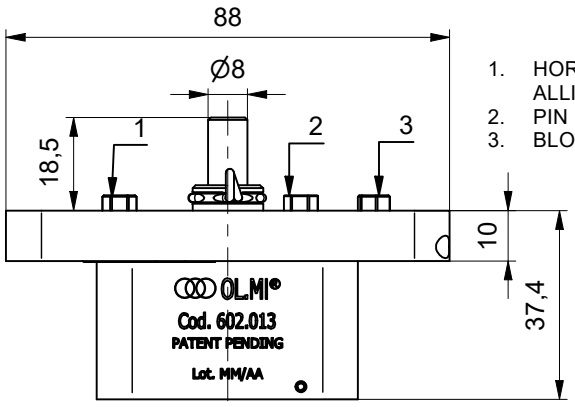


1. HORIZONTAL ALLIGNAMENT
2. PIN EXTRACTION
3. BLOCKING

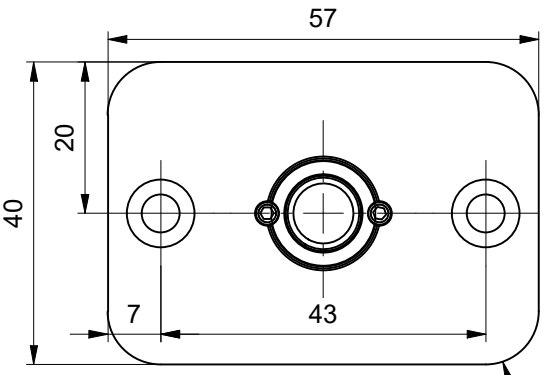

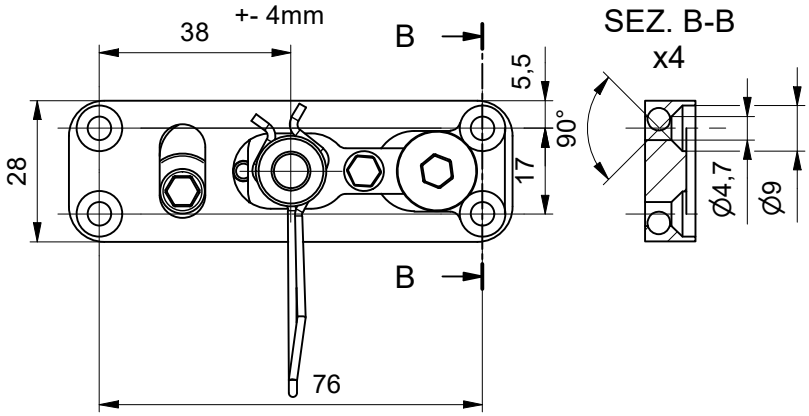

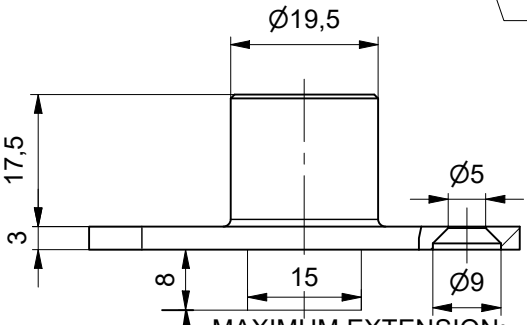



MAXIMUM EXTENSION:
TELESCOPIC SAFETY SYSTEM COMPENSATE GAP GREATER THAN *

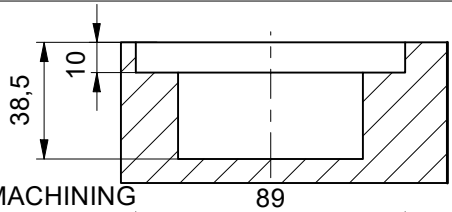

SEZ. A-A

DOOR MACHINING

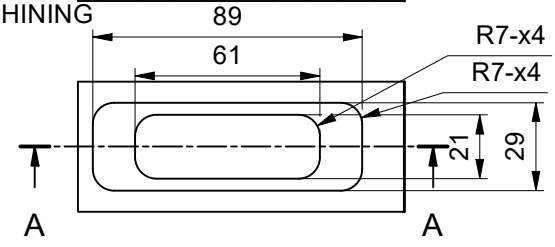


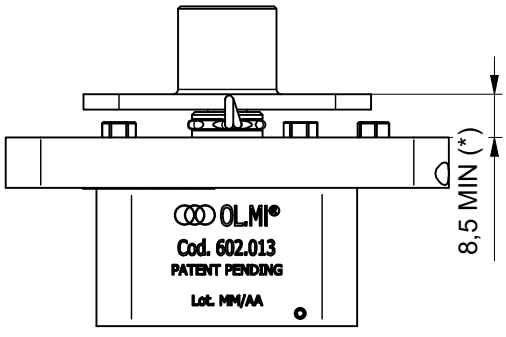


THE PERFORMANCES INDICATED IN THE TECHNICAL DATASHEET ARE RELATED TO A PROPERLY DONE INSTALLATION

This document is the exclusive property of OL.MI s.r.l. , by law, any reproduction or disclosure to third parties is prohibited.


CODE: 602.016-00

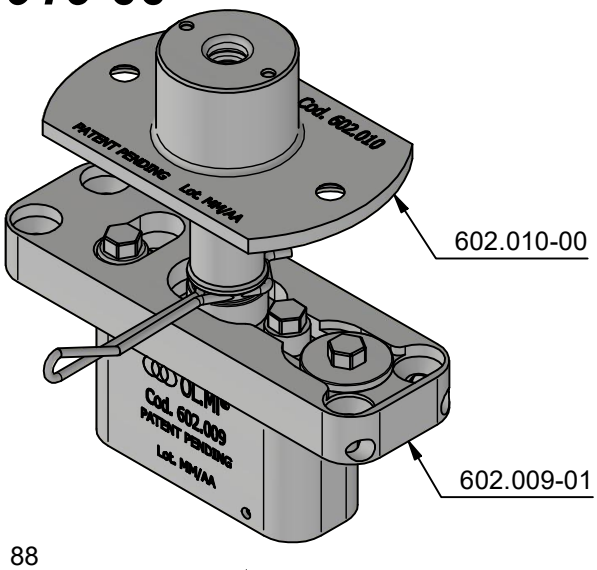



DOOR WEIGHT	FINISHING: DEEP BLACK OXIDATION 50 micron
max. 120 kg	
DOOR HEIGHT min. 1000 mm max. 3000 mm	TEMP. RANGE min. -15 °C max. +40 °C
DOOR WIDTH min. 500 mm max.1200 mm	




L MAX= 1000mm

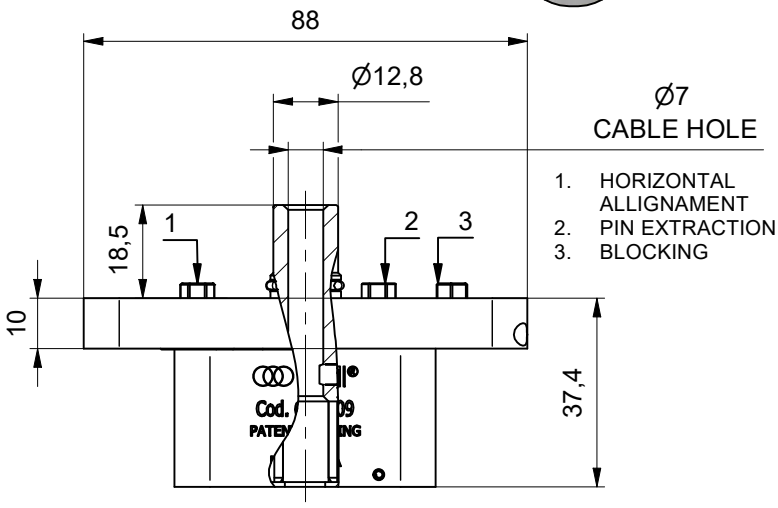


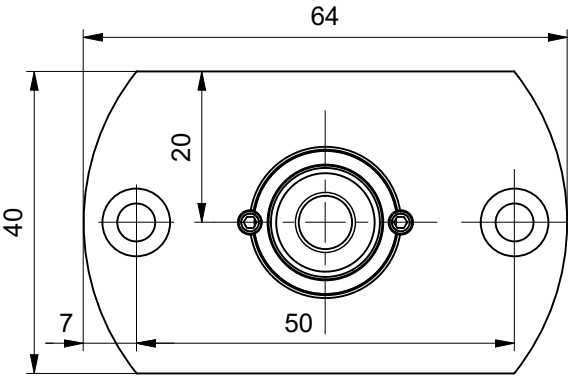

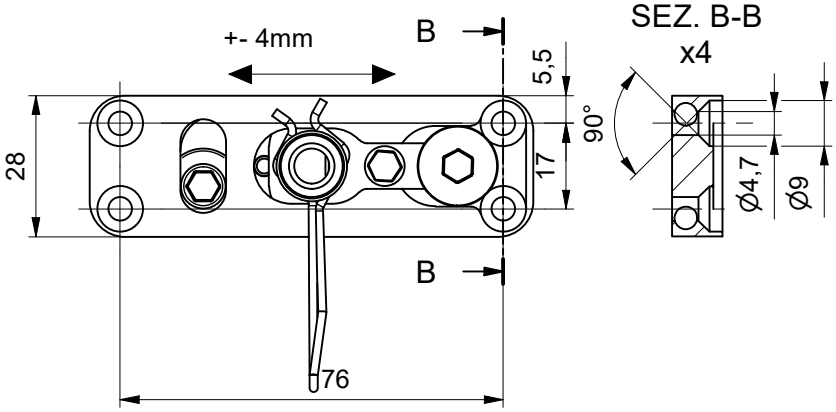


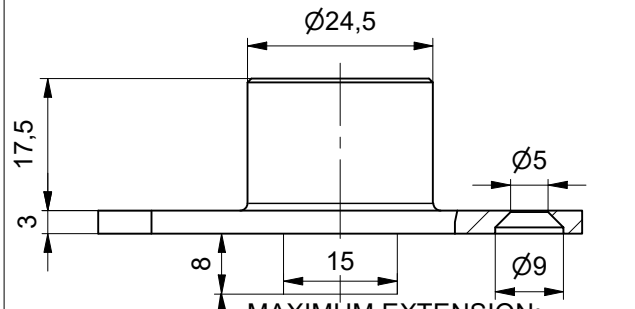


MAXIMUM EXTENSION:
TELESCOPIC
SAFETY SYSTEM
COMPENSATE GAP GREATER
THAN *

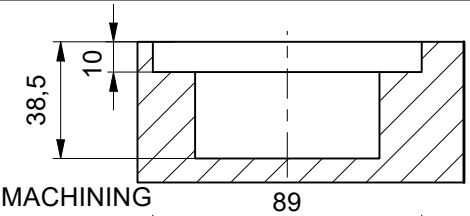

DOOR MACHINING

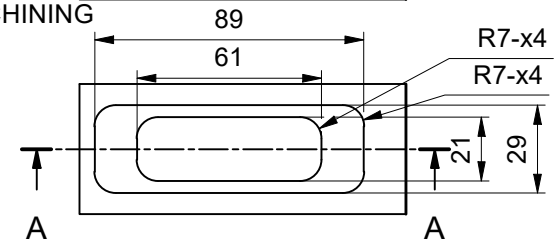

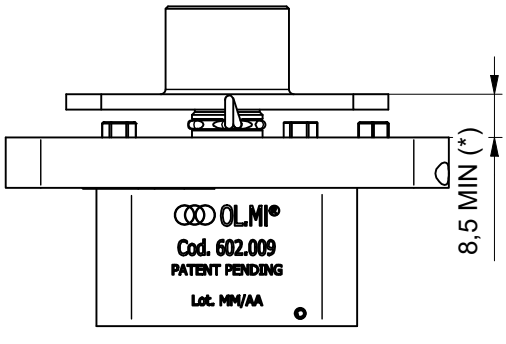

THE PERFORMANCES INDICATED IN THE TECHNICAL DATASHEET ARE RELATED TO A PROPERLY DONE INSTALLATION

This document is the exclusive property of OL.MI s.r.l. , by law, any reproduction or disclosure to third parties is prohibited.