


INCLUDED THE KIT


DOOR WEIGHT	FINISHING: DEEP BLACK OXIDATION 50 micron
max. 50 kg	
DOOR HEIGHT min. 1000 mm max. 3000 mm	TEMP. RANGE min. -15 °C max. +40 °C

DOOR WIDTH
min. 500 mm
max.800 mm
*WIDTH UP TO 1600 mm DEPENDING AXEL POSITION





L MAX= 800mm

DETAIL A (1 : 1)




SEZ. A-A




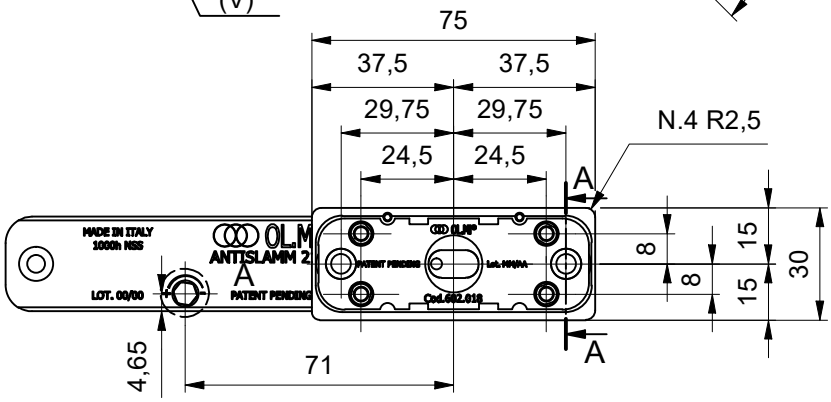


ANTISLAMM 21 R WITH HOLD OPEN AT 90°
*code:**500.739-00***


COMPOSITION		
CODE	CODE	FINAL CODE
500.735.00	602.018.00.A0	500.739.00.A0
500.735.00	602.018.00.A1	500.739.00.A1
500.735.00	602.018.00.A2	500.739.00.A2

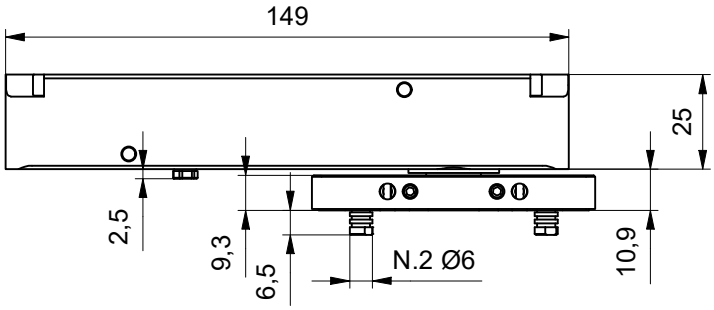


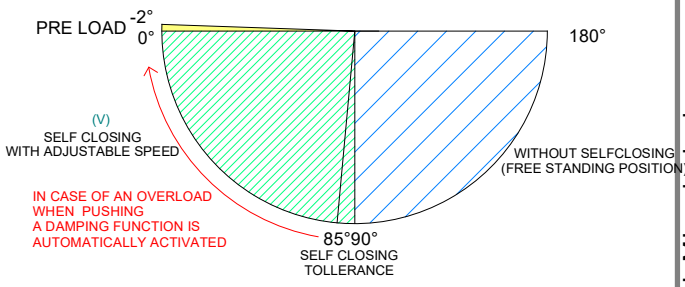

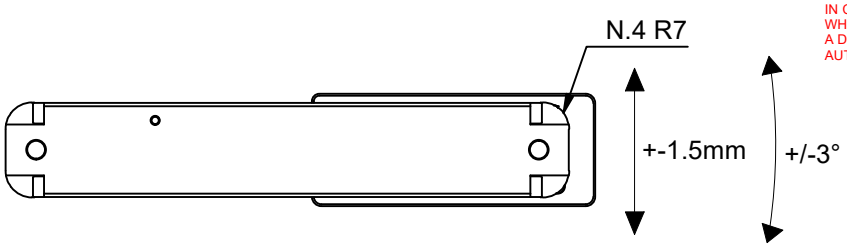

HINGE HOUSING

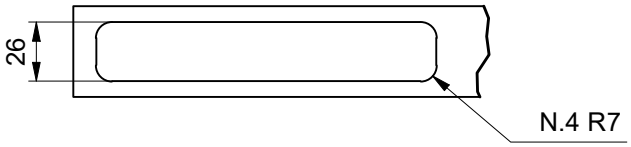

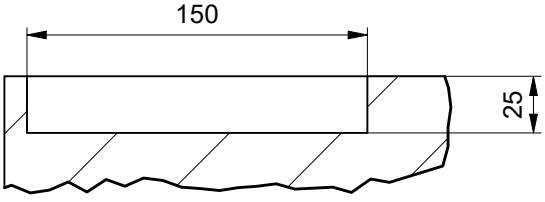



THE PERFORMANCES INDICATED IN THE TECHNICAL DATASHEET ARE RELATED TO A PROPERLY DONE INSTALLATION

This document is the exclusive property of OL.MI s.r.l., by law, any reproduction or disclosure to third parties is prohibited.


CODICE 602.021-00


DOOR WEIGHT	FINISHING: NATURAL OXIDATION PLATE AND AISI PIN
max.80 kg	
DOOR HEIGHT min. 1000 mm max. 3000 mm	TEMP. RANGE min. -15 °C max. +40 °C
DOOR WIDTH min. 500 mm max.800 mm *WIDTH UP TO 1600 mm DEPENDING AXEL POSITION	

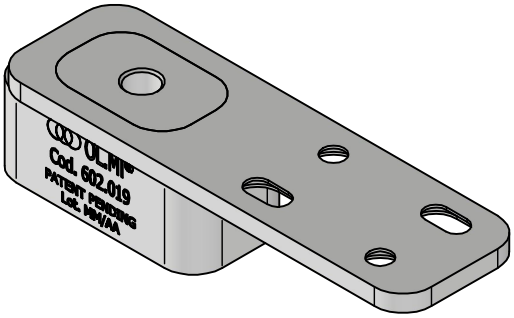






L MAX= 800mm

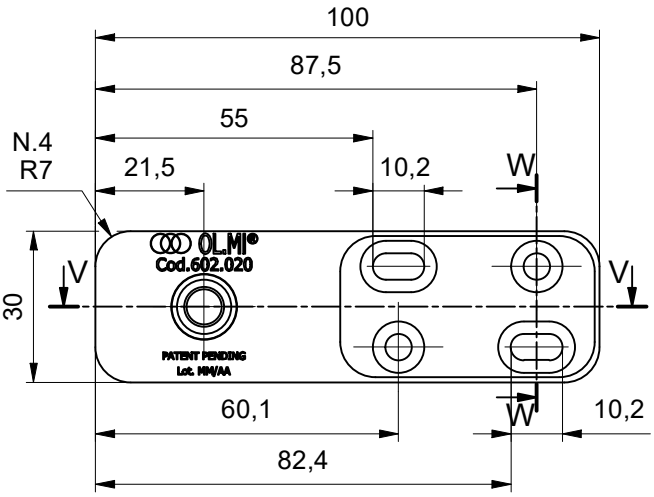

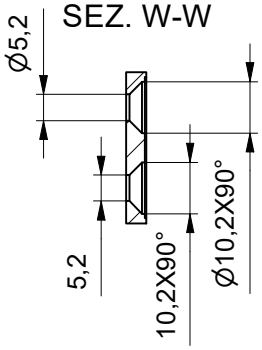


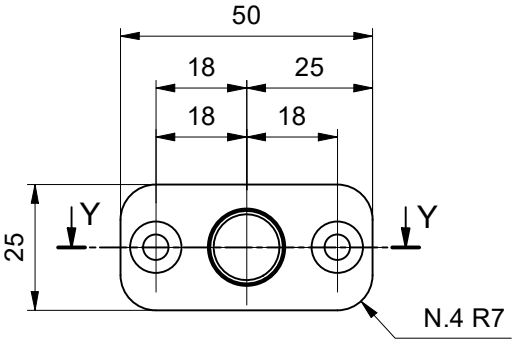


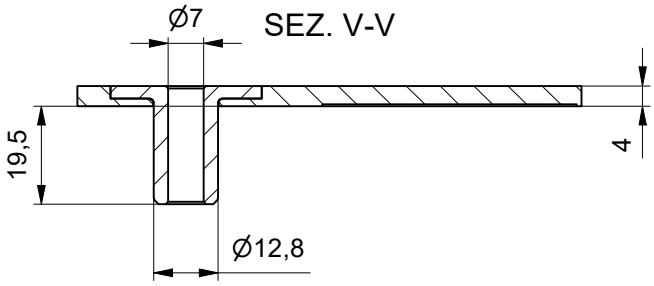

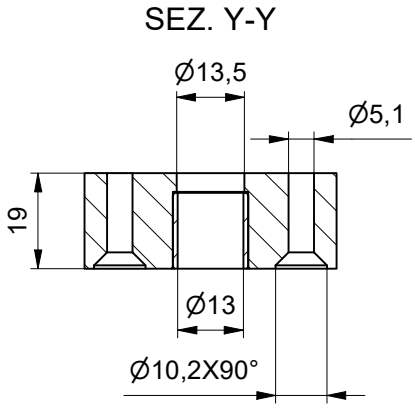

TOP FITTING HOUSING

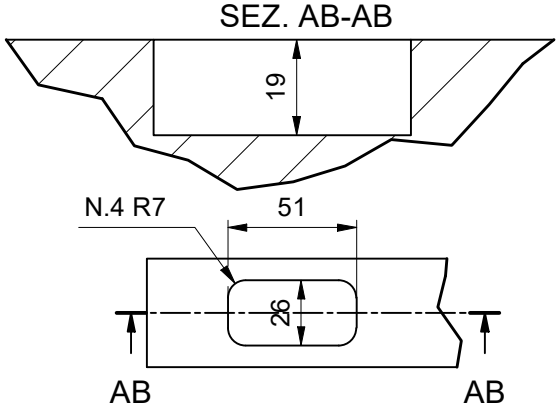

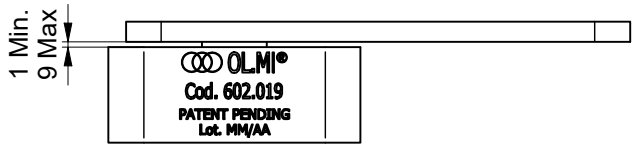

THE PERFORMANCES INDICATED IN THE TECHNICAL DATASHEET ARE RELATED TO A PROPERLY DONE INSTALLATION

This document is the exclusive property of OL.MI s.r.l. , by law, any reproduction or disclosure to third parties is prohibited.