



ANTISLAM^M 11-21-31

ULTRA-COMPACT HYDRAULIC HINGE
FOR VARIOUS APPLICATIONS

JUST INSTALL AND FORGET.

OL.MI EXPANDS ITS RANGE OF HYDRAULIC SOLUTIONS WITH THE INNOVATIVE ANTISLAM^M.

Designed for those who seek **aesthetics and functionality**, this hinge conceals a next-generation **integrated damper** and a precise, silent **hydraulic closing system** within just 25x25 mm.

Three variants tailored for different sectors: wooden doors, aluminum profile doors and commercial display refrigerators.

One single technology, suitable for different needs and applications.
The mechanism disappears. The design remains.

PERFECTION IN THE DETAILS.



ANTISLAM^M 11

HYDRAULIC HINGE
FOR WOODEN PIVOT DOORS



ANTISLAM^M 21

HYDRAULIC HINGE
FOR METAL-FRAMED PIVOT DOORS



ANTISLAM^M 31


HYDRAULIC HINGE
FOR REFRIGERATION DOORS

- Ultra-compact size 25x25 mm.
- Integrated damper for a silent, smooth and safe closure.
- Hydraulic self-closing system from approx. 85°/90° to 0° with adjustable speed and -2° preload.
- Available for right-handed (R) and left-handed (L) opening doors.
- Black finish with 50-micron deep oxidation.

ANTISLAMM 11

FOR WOODEN PIVOT DOORS

From designer walk-in wardrobes to high-end residential interiors, **ANTISLAMM 11** integrates **premium functionality into wooden doors with an invisible finish**, ensuring a smooth, flawless closing movement without compromising design.

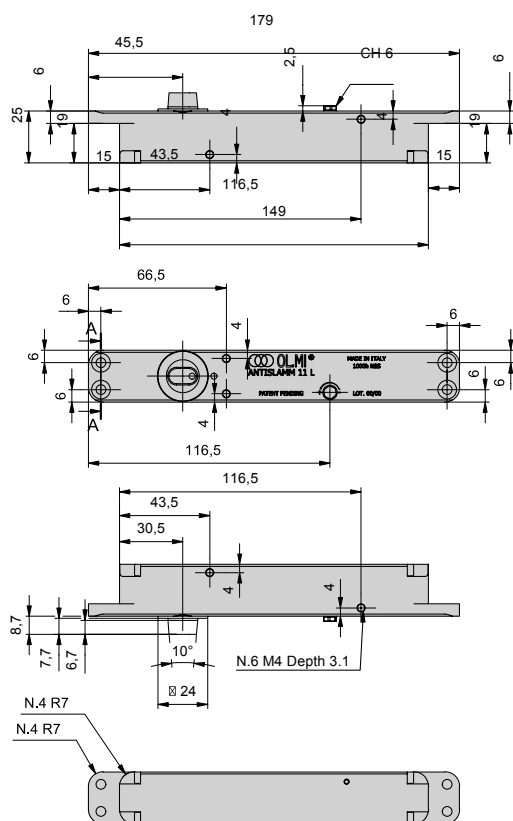

- **360° rotating ends**, with 90° increments, for **flexible and fully customizable installation**.

- Door width: **min. 500 mm – max. 800 mm** (or up to 1600 mm depending on the rotation axis)

- Door height: **min. 1000 mm – max. 3000 mm**

- For doors **up to 50 kg**.


- Complete mounting set available, with Pivot 11-21 or with Olmipivot accessories.



ANTISLAMM 21

FOR METAL-FRAMED PIVOT DOORS

From shower enclosures and luxurious metal-framed furnitures to custom high-end interior doors, **ANTISLAMM 21** is engineered to fix itself **seamlessly within structural profiles**, providing an excellent **hydraulic performance** for technical and architectural applications.

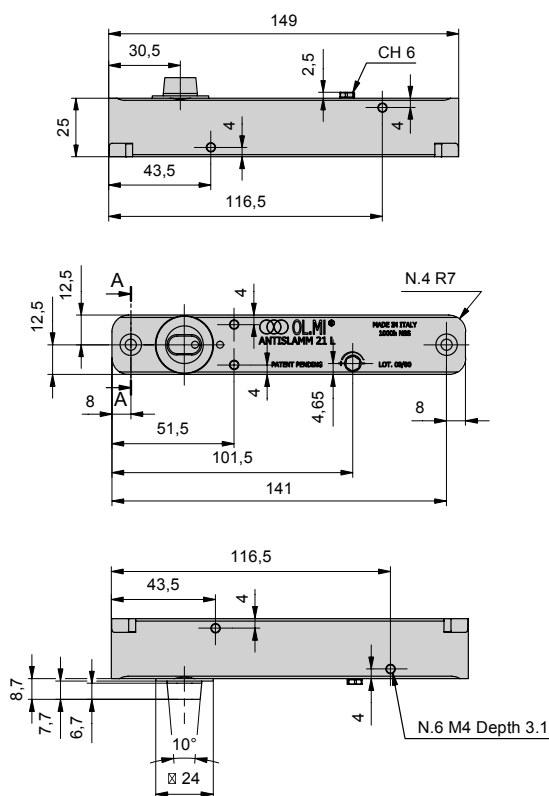


- **360° rotating ends**, with 90° increments, for **flexible and fully customizable installation**.
- Door width: **min. 500 mm – max. 800 mm** (or up to 1600 mm depending on the rotation axis)
- Door height: **min. 1000 mm – max. 3000 mm**
- For doors **up to 50 kg**.
- Complete mounting set available, with Pivot 11-21 or with Olmipivot accessories.

ANTISLAMM 31

FOR REFRIGERATION DOORS

From exclusive refrigerated wine cabinets to commercial display fridges, **ANTISLAMM 31** guarantees a **perfect hermetic seal**, maintaining a stable internal temperature inside the whole cabinet.

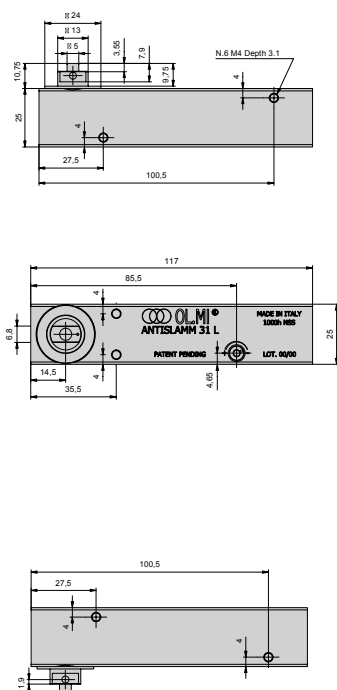

- Fully compatible with other models of OL.MI range, sharing the same fixing hole-positions and standard 25x25 mm dimensions.
- Door width: **min. 500 mm – max. 800 mm** (or up to 1600 mm depending on the rotation axis)
- Door height: **min. 1000 mm – max. 3000 mm**
- For doors **up to 50 kg**.

OL.MI Srl

+39 045 6450621 / info@olmisrl.com

Via dell'industria, 15 - Castelnuovo del Garda VR

www.olmisrl.com

